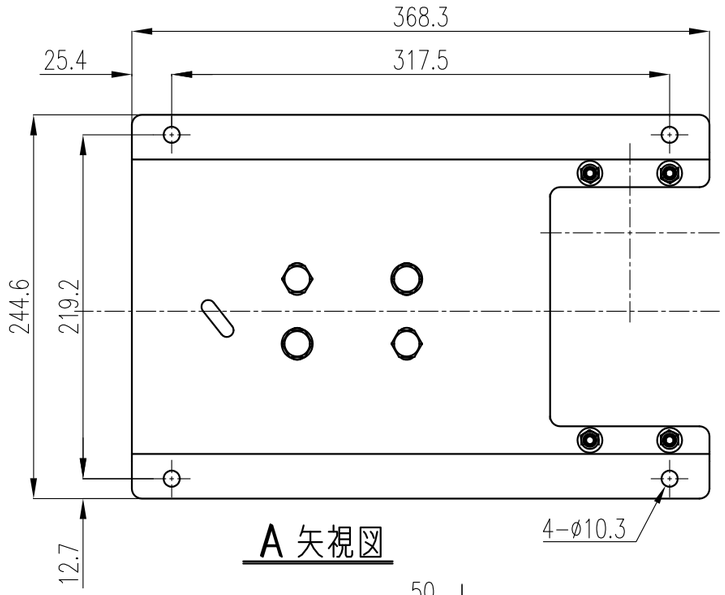

A 矢視図

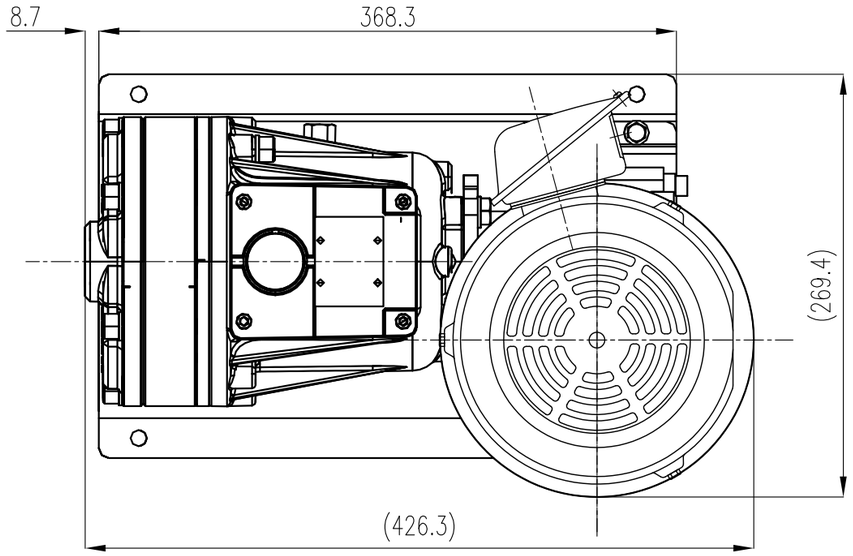

SF-PRV 屋内形　立形　AC200V-3Φ x 60Hzx1.5kW-4POLE

全閉外扇型（保護方式　IP44　冷却方式　IC411）
フランジ番号　FF165　　わく番号　90L

仕様	
ダイヤフラム数	3
流量調整	インバーター制御
最大吐出圧力	: 6.9MPa
最大吸込圧力	: 1.7MPa
流体温度	: 4.4-121℃
入口口径	: 1B(BSPT)
出口口径	: 3/4(BSPT)
最大許容粒径	: 500ミクロン以下
OIL容量	: 1.05L
重量	: 53kg(概算重量)

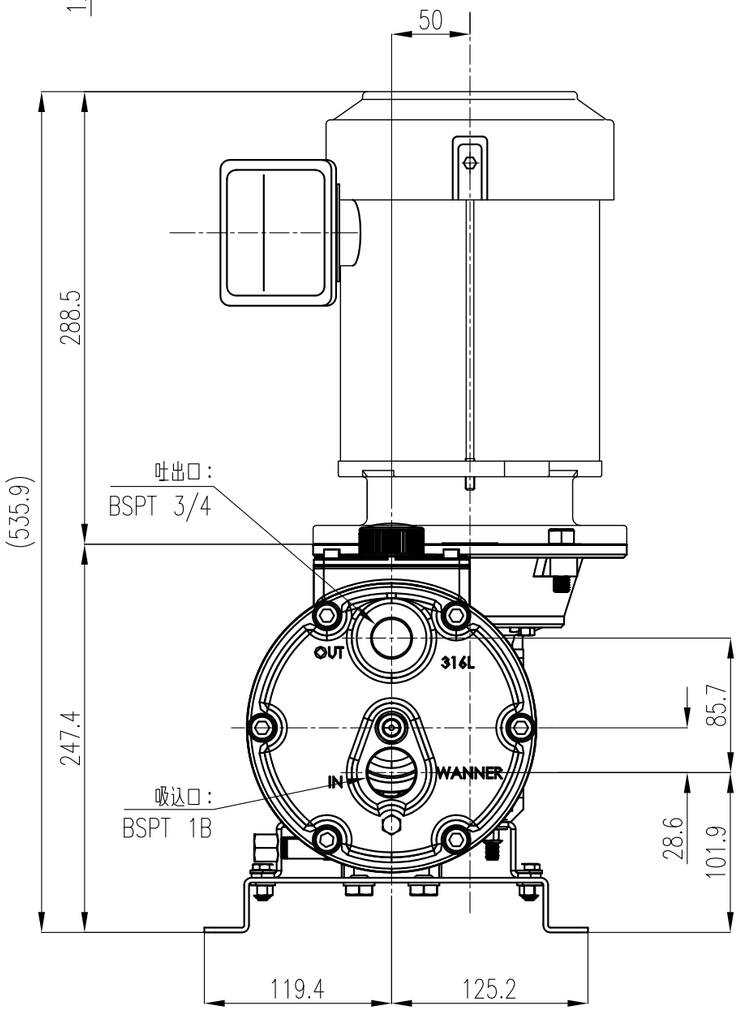

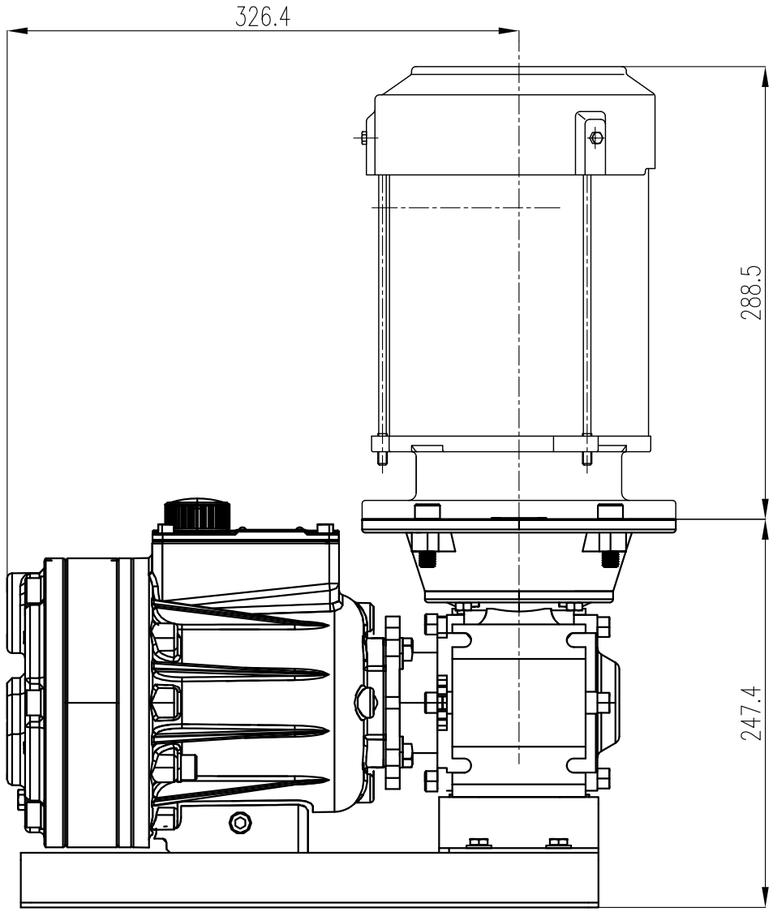

A

性能表　(圧力別流量)※参考数値

L/Hr @0.7MPa	L/Hr @1.7MPa	L/Hr @3.4MPa	L/Hr @6.9MPa	ポンプ回転数 (rpm)	減速比	モータ-回転数 (rpm)
36.48	35.124	32.136	24.469	30	60:1	1800
44.112	42.708	39.564	31.308	36	50:1	
55.5	54.12	50.616	42.432	45	40:1	
74.688	73.104	69.264	60.396	60	30:1	
90.048	88.296	84.18	74.772	72	25:1	
113.076	111.072	106.56	96.324	90	20:1	
151.452	149.052	143.844	132.252	120	15:1	
228.228	225.0	218.436	204.108	180	10:1	
304.992	300.948	293.016	275.976	240	7.5:1	
458.52	452.88	442.2	419.64	360	5:1	
612.0	604.68	591.36	563.4	480	7.5:1	3600
919.08	908.52	889.68	850.8	720	5:1	

SANKO LIMITED
1316-1 KAWAKAMI CHO,
TSUZUKI-KU,YOKOHAMA
KANAGAWA 224-0044 JAPAN
TEL:045-475-4811
FAX:045-475-4830

THIS DRAWING AND DESIGN IS THE PROPERTY OF SANKO LIMITED AND IS NOT TO BE REPRODUCED IN WHOLE OR PART, NOR EMPLOYED FOR ANY PURPOSE OTHER THAN SPECIFICALLY PERMITTED IN WRITING BY SANKO LIMITED

APPROVED		TITLE	Hydra-Cell Pump P400
CHECKED			Metalic Head
DESIGNED			IEC90B5
DRAWN	S,N	DWG NO.	REVISION
A2		ORDER NO.	
		SCALE Free	DATE 2021.6.10 SHEET OF